

The Series "1000" Vandal Resistant Emergency Telephone

For Elevators, Entry Ways, and Parking Decks

**100%
ADA
Compliant**

Features


- Built in automatic dialer, capable of 5 numbers
- Dials a second number if first number is busy or does not answer the call
- Red LED on front of phone to indicate "HELP is on the way" per ADA, Fed. Register A4.10.14
- Remote programmable from any touch tone phone
- Voice message recorder to identify location of caller
- Emits a digital code to DM-4 monitor to identify location of caller
- Name plate meets ADA specifications
- Amplified speaker for hearing impaired
- Vandal resistant stainless steel enclosure
- Single push button operation
- Metal push button
- Simple two wire connection (Ring & Tip)
- Complies with Part 68 of FCC regulations
- Powered entirely by phone line

Model LC-8 Line Concentrator

- The LC-8 allows one C.O. line to be shared by 8 separate emergency phones
- Auto answering of inbound calls
- Touch tone transferring
- Built in talk battery for fire service phone
- Programmable prank call detection
- Call waiting notice
- Page feature
- Fire floor phone connection
- Service access connection
- Fully functional battery backup
- Non-volatile E2 memory for all programmable features

Model DM-4 Monitor

- The ID number stored in the series "1000" Emergency Telephone will appear on the monitor
- The ID number appears after the second party presses the (*) button
- Monitor continuously decodes touch-tones

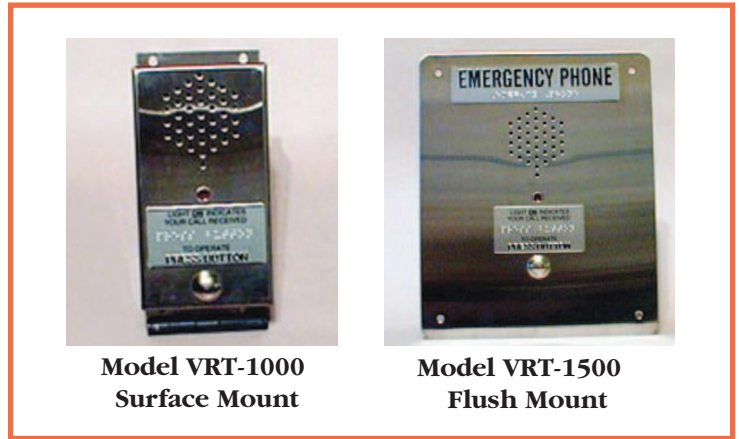

**Model VRT-1000
Surface Mount**


**Model VRT-1500
Flush Mount**

Available in two cabinet sizes

Model VRT-1000 • Surface Mount 3 7/8" W. x 7" H.

Model VRT-1500 • Flush Mount 9" W. x 11" H.

(Also available in #4 Bronze)

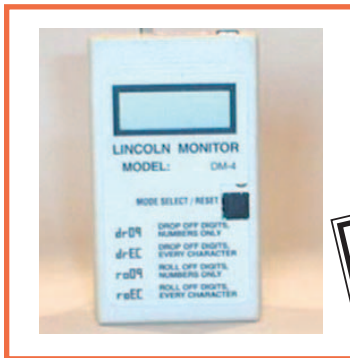

Made in the U.S.A.



Lincoln

FAX (708) 371-2477

PHONE (708) 371-2444



14639 SHORT STREET • POSEN, ILLINOIS 60469

Authorized Distributor

Telecommunication Peripheral Products Technical Practice

**1000 Series
Vandal Resistant
Telephone**

INSTALLATION

TELEPHONE

Attach telephone applications as shown

2nd PARTY



**Model VRT-1000
Surface Mount**

**C.O. Line
or
PABX System @ 24 VDC**



Standard Telephone



**Model VRT-1500
Flush Mount**

**C.O. Line
or
PABX System
@ 24 VDC**



**Model DM-4
Display Monitor**



Standard Telephone



Model VRT-1000



**Model LC-8
Line Concentrator**

C.O. Line



Standard Telephone

Attach telephone cord with RJ11 Modular end, into a RJ11 connector surface jack. If the choice is to hardwire, only two wires are required to be connected, the red and green wires from the telephone. (Ring & Tip)

OPERATION

1. To operate a series "1000" telephone, press & release button to make a call. Phone disconnects when call is complete.
2. The red LED on the front of the series "1000" telephone is a visual signal to the caller. This signal is activated by the receiving party pressing the star (*) button on their touch line phone.



Lincoln

FAX (708) 371-2477

PHONE (708) 371-2444



14639 SHORT STREET • POSEN, ILLINOIS 60469

Authorized Distributor

PROGRAMMING INSTRUCTIONS

LINCOLN LAND

1. Dial number of telephone line that emergency phone is connected to.
(PHONE MUST BE ON A DEDICATED LINE)
2. Emergency phone will answer (COME ON LINE) automatically after one (1) ring.
3. When phone comes on line, wait five (5) seconds before entering **SECURITY CODE** 1, 2, 3, 4, 5, 6. After which you should hear two (2) beeps.
4. Enter **PRIMARY NUMBER** followed by #, 0, 0.
After which you should hear two (2) beeps.
5. Enter **SECONDARY NUMBER** followed by #, 0, 1.
After which you should hear two (2) beeps. (OPTIONAL ENTRY)
6. Enter *, 4. To start **VOICE MESSAGE** recording. You have sixteen (16) seconds to record message. Enter any touch tone to stop recording. (OPTIONAL ENTRY)
Must include in message "hit star to talk to caller" so that the receiving party answering call can have 2-way communication.
7. Enter **IDENTIFICATION NUMBER** followed by #, 2, 0. After which you should hear two (2) beeps. (OPTIONAL ENTRY)
8. **HANG UP**, your phone is now programmed.

DEFINITIONS

PRIMARY NUMBER is the first number that you want the emergency phone to dial when button is pushed.

SECONDARY NUMBER is the second number that you want the phone to dial if the first number is busy or does not answer.

VOICE MESSAGE is the vocal message that you want the phone to announce to the receiver of the call.

IDENTIFICATION NUMBER is the number selected by the customer to identify the location of the emergency phone. This number will appear on a DM-4 Monitor and/or caller I.D. located at receivers phone.

SECURITY CODE is a select series of numbers identified by the phone to allow access to programming procedures. SECURITY CODE 1, 2, 3, 4, 5, 6 is a factory setting.



Lincoln

FAX 708/371-2477

PHONE 708/371-2444

14639 SHORT STREET • POSEN, ILLINOIS 60469



Authorized Distributor

LINCOLN LAND

CONTROL FUNCTIONS

Lite Led/Send ID # ----- *

Numeric Touch Tones ----- 0, 1, 2, 3, 4, 5, 6, 7, 8, or 9

* Touch Tone ----- *, *

Touch Tone ----- *,

Four (4) Second Pause ----- *, 7

Pulse/Touch Tone Switch ----- *, 6

Record Voice Message ----- *, 4

Disable Voice Message ----- *, 3

POSITION STORAGE

Primary Number ----- #, 0, 0

Secondary Number ----- #, 0, 1

Identification Number ----- #, 2, 0

Security Number ----- #, 1, 9

Time Delays ----- #, 1, 8

EXAMPLES (PHONE IS IN PROGRAMMING MODE)

Store Primary Number "9, Pause, 2, 6, 2, 1, 9, 0, 0"

Enter: 9, *, 7, 2, 6, 2, 1, 9, 0, 0, #, 0, 0

Store Secondary Number "6, 9, 9, 0, 3, 0, 9"

Enter: 6, 9, 9, 0, 3, 0, 9, #, 0, 1

Store Identification Number "2, 6, 2, 1, 9, 0, 8"

Enter: 2, 6, 2, 1, 9, 0, 8, #, 2, 0

Store Security Code "1, 2, 3, 4, 5, 6" (Factory Setting)

Enter: 1, 2, 3, 4, 5, 6, #, 1, 9

Store Time Delays

A ----- Talk/Listen Switch (0.2 seconds)

B ----- Maximum call time (3 minutes) (set to 0 for CPC hang up)

C ----- Silence Time (20 seconds) (set to 0 for CPC hang up)

2, 3, 2, 5, 2, 1, #, 1, 8 (**Factory Setting**)

F ----- Pulse Dial Rate (1 - 10 PPS, 2 - 20 PPS)

E ----- Dial Second Number If Busy (1 - Disable)

D ----- Dial Second Number If No Answer (# of Rings)



Lincoln

FAX 708/371-2477

PHONE 708/371-2444

14639 SHORT STREET • POSEN, ILLINOIS 60469



Authorized Distributor